

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 695 997 B1

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
16.10.2002 Bulletin 2002/42

(51) Int Cl.7: G06F 12/14

(21) Application number: 95305031.7

(22) Date of filing: 19.07.1995

## (54) Methods for providing secure access to shared information

Verfahren zur Realisierung geschützten Zugriffs auf gemeinsame Informationen

Méthodes pour réaliser un accès protégé à des informations partagées

(84) Designated Contracting States:  
DE FR GB

(30) Priority: 01.08.1994 US 284025

(43) Date of publication of application:  
07.02.1996 Bulletin 1996/06

(73) Proprietor: AT&T Corp.  
New York, NY 10013-2412 (US)

(72) Inventors:  
• Haas, Zygmunt  
Holmdel, New Jersey 07733 (US)  
• Paul, Sanjoy  
Atlantic Highlands, New Jersey 07716 (US)

(74) Representative:  
Watts, Christopher Malcolm Kelway, Dr. et al  
Lucent Technologies (UK) Ltd,  
5 Mornington Road  
Woodford Green Essex IG8 OTU (GB)

(56) References cited:  
WO-A-91/12693

- HAAS Z J ET AL: "Secure access to electronic newspaper" WIRELESS NETWORKS - CATCHING THE MOBILE FUTURE - 5TH IEEE INTERNATIONAL SYMPOSIUM ON PERSONAL, INDOOR AND MOBILE RADIO COMMUNICATIONS (PIMRC 94), AND ICCR REGIONAL MEETING ON WIRELESS COMPUTER NETWORKS (WCN), PROCEEDINGS OF WIRELESS NETWORKS CATCHING, pages 805-809 vol.3, XP002100913 1994, Amsterdam, Netherlands, IOS Press, Netherlands
- BALEN SON D M: "Automated distribution of cryptographic keys using the Financial Institution Key Management Standard" IEEE COMMUNICATIONS MAGAZINE, SEPT. 1985, USA, vol. 23, no. 9, pages 41-46, XP002100914 ISSN 0163-6804

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 695 997 B1

**Description****FIELD OF THE INVENTION**

5 [0001] The present invention relates to a method for providing secure access to shared information in a network computing environment. More particularly, the present invention relates to a method for providing efficient and secure access in a network to information consisting of electronically stored documents.

**BACKGROUND OF THE INVENTION**

10 [0002] There is at present a need for methods and apparatus for providing secure access to shared information in a computer network environment. More specifically, there is a need for a large-scale system (i.e. one having a large number of users) in which a dynamically- varying subset of users is permitted access to a relatively large amount or grouping of associated information for a limited time duration, the time duration being user-dependent. For example, for an electronic newspaper -- i.e. an electronically-stored copy or version of a conventional printed newspaper or the like -- a set of users (the subscribers) is permitted access to the electronic newspaper for a predetermined length of time in return for a user-paid subscription fee. As used herein, the term electronic newspaper is intended to broadly denote any grouping or set of associated, electronically-stored information to which access is to be provided to a relatively large and dynamically changing plurality of users.

15 [0003] Typically, there are no significant restrictions on either the storage system or the transmission medium for such shared information. Thus, it would be desirable to provide a universal mechanism to prevent unauthorized access to the shared information.

20 [0004] WO-A-9112693 discloses a method as set out in the preamble of claim 1. This method is for controlling access to broadcast signals.

**Summary of the Invention**

25 [0005] According to the invention there is provided a method as set out in claim 1.

30 [0006] An advantageous method in accordance with the present invention for securely sharing information in networks is provided through an association between the communicating parties formed using at least two cryptographic keys. A server contains the information to be accessed, encrypted by a first key, and the user requesting the information holds a second key. A "locker", associated with or accessible by -- optionally only by -- the user, holds the first key in a form that has been encrypted (i.e. "locked") with the second key of the user, so that only that user can decrypt the first key and thereby enable decryption of the information to be accessed. Typically, the locker is a buffer or memory storage location at the server although it may advantageously be located anywhere on the network, as for example at the user's workstation. The information securement method of the present invention may thus be termed the *Locker Key* method and the first key may be denoted the *Locker Key* since it is stored in encrypted form in the user's locker. When an authorized user requests access to the stored information, the encrypted first key is placed in the user's locker. The user accesses his locker, employs his second key to decrypt the first key and then uses the decrypted first key to decrypt the information. The inventive method accordingly uses two symmetric cryptographic systems: (1) the first key that both encrypts and decrypts the information to be accessed, and (2) the second key that both encrypts and decrypts the first key.

35 [0007] The inventive method provides a number of significant advantages. The information to be accessed is encrypted only once and only a single copy is stored by or at the server for access by a dynamically-varying plurality of users. Moreover, the encryption of the information is performed off-line rather than at the time that any particular user requests access to that information. In addition, there is no need to redistribute the first key when it changes. The method of the invention is particularly advantageous and suitable for use in providing secure access electronic newspapers and multimedia documents and the like.

40 [0008] The present invention may also provide users with an interface routine that integrally incorporates and restricts user access to the first key. The routine is run or executed on the user's local terminal or computer or machine which automatically communicates with the server, retrieves the encoded first key from the user's locker, decrypts the first key, uses the decrypted first key to decrypt the information from the server, and then displays the information to the user. When the user's permission to access the information expires, no new key is placed in the user's locker and the interface routine will be unable to successfully decrypt the information.

45 [0009] The various features of novelty which characterize the invention are pointed out with particularity in the claims annexed to and forming a part of this disclosure. For a better understanding of the invention, its operating advantages and specific objects attained by its use, reference should be made to the accompanying drawings and descriptive matter in which there are illustrated and described several currently preferred embodiments of the invention.

**BRIEF DESCRIPTION OF THE DRAWINGS**

[0010] In the drawings, wherein similar reference characters denote similar elements throughout the several views:

- Fig. 1 is a pictorial block diagram of an embodiment of the present invention;  
 Fig. 2 is a pictorial diagram of a first embodiment of the present invention for controlled access to an electronic newspaper;  
 Fig. 3 is a pictorial diagram of a second embodiment of the present invention employing an interface routine operable for providing controlled access to the electronic newspaper;  
 Fig. 4 is a pictorial drawing of a third embodiment of the present invention;  
 Fig. 5 is a pictorial drawing of a fourth embodiment of the present invention;  
 Fig. 6 is a computer source code listing of a first embodiment of a portion of an interface routine in accordance with the present invention; and  
 Fig. 7 is computer source code listing of a second embodiment of a portion of an interface routine in accordance with the present invention.

**DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**

[0011] The present invention provides a novel solution to the problem of providing secure access to shared information in a network computing environment. In general, security in communications systems involves the attributes of source/destination authentication, information privacy, information integrity, prevention of unintended service denial, and copyright enforcement. The present invention addresses primarily two of those attributes, namely authentication and copyright enforcement.

[0012] The invention operatively provides secure access to shared information, such as an electronic newspaper, by a method useful in an architecture in which a network, including a group of users, may wish or seek to acquire access to a shared piece or set of information located in the same place (e.g. at the server). This is accomplished through the use of two secret encryption keys -- a first secret key  $K_{news}$  and a second secret key  $K_i$ . The first secret key  $K_{news}$  is also referred to herein as the "locker key"  $K_{news}$ , which refers to the fact that during at least one step of the inventive method the key  $K_{news}$  is stored in a "locker" or buffer or storage location associated with a particular user that is legitimately permitted to access the stored information (i.e. the electronic newspaper). The second secret key  $K_i$  is the private key of the user  $i$ . Throughout this specification, the designation user  $i$  should be understood as denoting either a particular human operator or an application program executing at a subscriber work station or network node or connection. The notation  $E_K(X)$ , as used herein, identifies information  $X$ , such for example as an electronic newspaper 32 (Fig. 1), that has been encrypted using the encryption key  $k$ .

[0013] The inventive method is pictorially depicted in Fig. 1 to which reference should be made in considering the following description.

[0014] The inventive method protects the stored information, e.g. the electronic newspaper 32, from users outside of the authorized group by encrypting it with the first key  $K_{news}$  (i.e. the server's private key, generated by and known only to the server). Then the key  $K_{news}$  is made available only to users within the authorized group. Each user  $i$  is assigned or provided with access to a "locker". It is generally contemplated that the locker is a storage location or buffer 10 at a server 30, but it may alternatively be located anywhere in the network 40. The locker key  $K_{news}$  is placed in the user's buffer 10 in a form encrypted with that user's private key  $K_i$ , i.e.  $E_{K_i}(K_{news})$ . A single copy of the electronic newspaper 32 is stored at or by the server 30, encrypted with the key  $K_{news}$ . A user  $i$  that wishes to access or view (i.e. purchase) that stored copy of the electronic newspaper 32 transmits his private key  $K_i$ , which is known to and/or generated by the user  $i$ , to the server 30. In return, the key  $E_{K_i}(K_{news})$ , i.e.  $K_{news}$  encrypted by the key  $K_i$ , is placed in the buffer 10 of the user  $i$ . When user  $i$  thereafter wishes to view or access the encrypted newspaper, or a portion thereof, user  $i$  retrieves the encrypted form of the key  $K_{news}$  from the buffer 10, uses his private key  $K_i$  to decrypt the key  $K_{news}$ , and then uses the decrypted key  $K_{news}$  to decrypt the encrypted newspaper or desired portion thereof.

[0015] The first key  $K_{news}$  and the second key  $K_i$  may, for example, be defined as a series of characters, such as numbers or letters or combinations thereof. Network-generated numbers may be in binary form or may, after being generated, be converted to binary form.

[0016] The exchange of information for accessing an electronic newspaper in accordance with one form of the inventive method is more particularly illustrated in Fig. 2. In the initial set-up phase, the user  $i$  transmits his ID as an identification parameter -- e.g. a network identification name or number -- his credit card number (for billing purposes), and his/her private key  $K_i$  to the server 30. This information is preferably encrypted with a *public key*  $K_{serv}$  of the server 30 to prevent unintended third party access. The server 30 may, optionally, then confirm the request or subscription.

[0017] The server's public key  $K_{serv}$  is assumed to be freely available to subscribers from a key registry, which is the equivalent of a "yellow pages" for public key cryptography. The public key  $K_{serv}$  allows secure transmission of start-up

or query data to various servers, such as for storing and providing access to newspapers, weather, stock quotes, etc. Asymmetric cryptology by public key encryption is used only for public key  $K_{serv}$  at this initial set-up stage for secure transmission of the secret information of user  $i$  to the server (e.g., the key  $K_i$ ) and to mask the identity of the user. In contrast, the inventive method employs symmetric cryptography for subsequent encryption/decryption of data with keys  $K_i$  and  $K_{news}$ . Thus, after the set-up stage user  $i$  may request access to the newspaper data by sending to the server 30 his ID ( $i$ ) with a description (*data-descriptor*) of the requested data. These fields may optionally be encrypted with the private key  $K_i$  to provide user privacy, i.e. where user  $i$  does not want others to know what data he is accessing. The server 30 responds by sending the key  $K_{news}$ , encrypted with the user's private key  $K_i$ . Then, typically, the requested newspaper data, encrypted with  $K_{news}$ , is sent to user  $i$ .

[0018] The entire newspaper represents a rather large amount of data, and it is anticipated that user requests will generally be article-based -- i.e. a user may first request an index of articles, with each future access seeking only one or more individual articles. Thus, each article in the newspaper may be individually encrypted, allowing more rapid access to each individual article. However, the invention is also intended to accommodate variations in which the entire newspaper is encrypted as a single document.

[0019] The present invention provides a number of important advantages. For one, only a single encrypted copy of the electronic newspaper is stored on or by the server. Moreover, encryption of the newspaper is performed only once for a given key  $K_{news}$ . In addition, the encryption can be done "off-line", i.e. not in "real time", thus avoiding server congestion at times of peak demand.

[0020] The inventive method, as hereinabove described, provides a reasonably high measure of security. However, it is potentially susceptible to fraud by subscribers that may improperly distribute the keys  $K_i$  and  $K_{news}$ , or the decrypted newspaper itself, to non-subscribers or others who do not pay or otherwise properly request and obtain access to the information. Protection against distribution of the decrypted locker key  $K_{news}$  is provided by frequent changing of the locker key. Thus, the server 30 may periodically re-encrypt the newspaper using a new locker key  $K'_{news}$  and place this new key, encrypted by each respective user's private key  $K_i$ , in all eligible lockers. When a user's access permission expires, that user's locker is not reloaded with the encrypted new locker key. Advantageously, in accordance with the invention, when the locker key changes, the server need not multicast or widely distribute the new locker key; only the lockers of then eligible or authorized users need to be modified. Authorized users may thus access their lockers with their respective private keys  $K_i$  to retrieve and decrypt the encrypted new locker key.

[0021] A second embodiment of the inventive method seeks to avoid such fraudulent behavior by restricting users' direct access to the server 30, and to the decrypted key  $K_{news}$ , through the use of an interface routine. The interface routine is a relatively short software program that is sent as object code to the user  $i$ , as shown in Fig. 3, in response to user payment of the information access fee. The user  $i$ 's work station uses the interface routine to access the server 30 in such a way that the value of the key  $K_{news}$  is hidden from user  $i$ . This prevents user  $i$  from improperly distributing the key  $K_{news}$  or from manually decrypting and distributing the newspaper. The interface routine acts as an extension of the server 30 that is remotely executed on the user  $i$ 's hardware. Thus, all communication between the user  $i$  and server 30 is performed through and by the interface routine. At each intended access of the stored information, the user  $i$  invokes the routine, which automatically, and without user intervention, retrieves the encrypted key  $E_{K_i}(K_{news})$  together with the encrypted newspaper portion of interest  $E_{K_{news}}(news)$  from the server 30. The interface routine then uses the user  $i$ 's private key  $K_i$  to decrypt the locker key  $K_{news}$ , and uses the decrypted locker key  $K_{news}$  to decrypt the newspaper or data portion. The decrypted text is then sent to the user  $i$ 's application program or displayed on his/her screen, as for example in a window of a graphical user interface.

[0022] Of course, the user  $i$  may still fraudulently redirect the displayed output to a file and distribute the file itself to others. However, the relatively large size of the newspaper makes it difficult and time consuming for users to download the entire newspaper. Thus, a user's ability to fraudulently distribute such data is limited.

[0023] Since each user  $i$  knows his/her locker key  $K_i$ , user  $i$  could still intercept the communication between the routine and the network to retrieve  $E_{K_i}(K_{news})$ , obtain and publicly distribute the public key  $K_{news}$  (i.e. manually bypass the interface routine). According to the invention this problem is avoided by creating the user key  $K_i$  from two components: one component  $K_i^u$  supplied by the user, and one component  $K_i^s$  supplied by the server. The key  $K_i$  is then computed by the server and by the interface routine, for example as  $K_i = K_i^u \oplus K_i^s$  where  $\oplus$  denotes a bitwise exclusive-or (XOR) operation; this is depicted in Fig. 4. Thus, only the combination of the server 30 and the interface routine know  $K_i$ ; the server-supplied  $K_i^s$  is hidden in the routine, and the composite key  $K_i$  is not therefore known to the user  $i$ . Accordingly, even if a user  $i$  intercepts the communication between the server 30 and the routine, he cannot retrieve the key  $K_{news}$  because he does not know  $K_i$ . Moreover, no user other than the intended user  $i$  can provide  $K_i^u$  to the routine to compute the composite key  $K_i$  that is required to access the encrypted newspaper data.

[0024] It will be recognized that a dishonest user  $i$  may yet transmit a copy of the interface routine to an unauthorized user  $j$ , who could then use the routine to access the newspaper so long as user  $i$  additionally supplies user  $j$  with his (secret) key component  $K_i^u$ . This permits user  $j$  to invoke the interface routine and to supply user  $i$ 's key component  $K_i^u$  to the routine to attain access to and view the electronic newspaper. A variety of deterrents to such practice may

optionally be employed.

[0025] A first deterrent is to have the interface routine, when invoked using the correct user key component  $K_i^\mu$ , configured to allow access to the user  $i$ 's credit card number, as for example by flashing or displaying the credit card number of user  $i$  on the screen. Such an improvement may make user  $i$  somewhat more reluctant to provide others with the interface program and his key component  $K_i^\mu$ .

[0026] A second deterrent is to have the user transmit during the set-up stage -- as for example with the initial message from the user -- (1) his credit card number and (2) a list of Internet Packet (IP) addresses of a limited number of machines or stations or locations from which user  $i$  anticipates seeking access to the electronic newspaper. The interface routine may then be configured so that each time it is invoked, it transmits to the server the IP address of the node or terminal from which it has been invoked and the routine's ID, which is itself associated with the particular user  $i$ . The server 30 can then confirm whether the routine was invoked from one of the previously-specified IP addresses and, if not, the server may (1) separately and additionally charge the user  $i$  for each such access from a machine or location not in the original list, (2) deny access to the machine or location not in the original list, or (3) direct all responses to the location of one of the previously specified IP addresses. Of course, the user  $i$  may selectively request a change of his registered IP address by sending such request to the server in suitably encrypted form, thus preventing user  $j$  from altering user  $i$ 's registration information without user  $i$ 's knowledge.

[0027] A third deterrent is to have the server 30 allow only one copy of each user's interface routine to be active at any given time. This variation is shown in Fig. 5 and requires that the routine send its IP address to the server 30 when it is invoked. If the server 30 finds that the same routine is already active, it will prevent the newly-invoked routine from proceeding to retrieve either the locker key or the encrypted version of the electronic newspaper. Thus, if a user  $i$  distributes copies of his interface routine to one or more unauthorized users  $j$ , only one of them will be able to use the routine at any given time, all others being denied concurrent service.

[0028] The herein-disclosed methods of the present invention that utilize an interface routine are, as will be appreciated, most effective if the interface routine is constructed so as to be highly tamper-resistant. For example, the routine should integrally hide the values of the required keys and key components. Preferably, the code is made sufficiently difficult so that "manual" processing is required to reverse engineer (i.e. disassemble) the code. Additionally, the routine may be written such that a forged or unauthorized version of such a routine would be readily detectable by server 30.

[0029] Preferably, to prevent unauthorized access the routine will be frequently changed, i.e. customized and redistributed, for example, with every new electronic newspaper edition. The routine is customized to have a structure that prevents improper automatic retrieval of data from the routine code and that renders manual retrieval of data much more expensive in time and resources than the price of access to the data itself. Customization of the routine may, by way of example, involve changing the location of the keys within the routine's code or within run-time memory, changing the data flow of the routine's execution, or adding extra commands. In addition, the routine may interleave data and executable code to prevent automatic disassembling of the code. Preferably, the hidden keys may be translated into meaningful machine language instructions and the key location randomly moved within the machine code of the routine. Furthermore, references in the program to the location of a key can be indirect so as to require an intruder to closely follow the code execution flow to determine the key location.

[0030] Figs. 6 and 7 show, by way of nonlimiting example, portions of two differently-customized routines that perform the same task. Two keys are hidden in different program locations that are only indirectly accessed. In these routines, the indirect access is based on the content of another memory location (FIRST and SECOND), but can also be implemented using the contents of a register. This arrangement makes it difficult to design a program operable for determining the location of the key. The key in both routines is, moreover, translated into a sequence of legitimate machine instructions. These routines can accordingly hide the same key in different locations or two different keys in different locations.

[0031] An example illustrating the operating efficiencies attainable in accordance with the present invention now be described.

[0032] The following calculations compare the access times experienced by users accessing an electronic newspaper, first in a system  $S_1$  based on batch encryption in accordance with the inventive method, and then in a second system  $S_2$  in which the encryption is performed in real time in response to user requests as in the prior art. The calculations assume a single encryption server and that the arrivals of requests at the electronic newspaper server are Poisson-distributed with parameter  $\lambda$ . The access time in each of the systems  $S_1$ ,  $S_2$  consists of a number of components.

[0033] System  $S_1$  performs the steps of: retrieving the encrypted locker key, hereinafter  $-r(LC)$ ; retrieving the pre-computed ciphertext of the requested article, hereinafter  $-r(CT)$ ; and transmitting the two items back to the user, hereinafter  $-t(LC + CT)$ .

[0034] System  $S_2$  performs the steps of: retrieving the requested data, hereinafter  $-r(A)$ ; encrypting the articles, hereinafter  $-e(A)$ ; and transmitting the ciphertext, hereinafter  $t(CT)$ .

[0035] Assuming zero load, the access times  $x_1$  for the system  $S_1$  and  $x_2$  for the system  $S_2$  are:

$$x_1 = r(LC) + r(CT) + t(LC + CT) \quad x_2 = r(A) + e(A) + t(CT) \quad (\text{Eq. 1})$$

In general, the server-generated key  $LC$  is of fixed length, whereas the lengths of the cipher text  $CT$  and of the cleartext article  $A$  are random variables (r.v.). Thus,  $x_1$  and  $x_2$  are also r.v. with some distribution. Each retrieval process  $r(\bullet)$  and transmittal process  $t(\bullet)$  can be modeled as a queue. Consequently, each of the systems  $S_1$  and  $S_2$  employs a series of three queues in tandem. This example assumes the following relationships:

1. One queue is considerably more congested than others, creating a bottleneck.
2. The time to perform the retrieval, transmission, and encryption operations is linear with the amount of data.
3. The time to retrieve the encrypted locker key is considerably shorter than the time to retrieve the article ciphertext; i.e.,  $LC \ll CT$  and  $r(LC) \ll r(CT)$
4. The size of the ciphertext is proportional to and longer than the cleartext size.
5. The time to encrypt a piece of data is considerably longer than the time to retrieve and/or to transmit the same piece of data.

**[0036]** The calculations further assume that the bandwidth of the retrieval operation is considerably larger than the network transmission bandwidth. This last assumption, while reasonable in conventional networks, may not be valid in some systems -- as for example in gigabit networks.

**[0037]** Based on the foregoing assumptions, the calculations approximate the systems  $S_1$  and  $S_2$  as single  $M/G/1$  queue systems with access times given, respectively, by:

$$x_1 \approx t(LC + CT) \approx t(CT) \text{ and } x_2 \approx e(A) \quad (\text{Eq. 2})$$

**[0038]** The term  $M/G/1$ , as used herein, defines a specific type of queue system; such a queue system is, for example, described in L. Kleinrock, *Queueing Systems: Vol. 1: Theory* (John Wiley & Sons 1975).

**[0039]** By assuming the above-mentioned relationships (2), (4) and (5), we may assert that

$$\bar{x}_2 = k \cdot \bar{x}_1 \quad (k > 1).$$

**[0040]** Using the Pollaczek-Khinchin formula (L. Kleinrock, "Queueing Systems: Vol. 1: Theory", p. 191 (John Wiley & Sons 1975)), the waiting times in the queues  $S_1$  and  $S_2$ , respectively, are:

$$W_{S_1} = \frac{\lambda}{2} \cdot \frac{\bar{x}_1^2 (1 + C_{x_1}^2)}{(1 - \rho_1)} \quad \text{and} \quad W_{S_2} = \frac{\lambda}{2} \cdot \frac{\bar{x}_2^2 (1 + C_{x_2}^2)}{(1 - \rho_2)} \quad (\text{Eq. 3})$$

where  $\rho_i$  is the utilization of queue  $i$ , and  $C_{x_i}$  is the coefficient of variation of the process  $x_i$  ( $i = 1, 2$ ). The coefficient of variation of a random process  $x$  is defined as

$$C_x = \frac{\sqrt{\sigma_x}}{\bar{x}}.$$

Thus,

$$\frac{W_{S_2}}{W_{S_1}} = \frac{k(1 + C_{x_2}^2)(k - \rho_1)}{(1 + C_{x_1}^2)(1 - \rho_2)} \quad (\text{Eq. 4})$$

[0041] Due to assumption (4) above, the distribution of the ciphertext length has different parameters but the same shape as the distribution of the cleartext length. Furthermore, by virtue of assumption (2), the times to transmit the ciphertext and to encrypt the cleartext are proportional to the size of the cipher and cleartext, respectively. Consequently, the distributions of  $r.v.t(CT)$  and  $e(A)$  have the same shape and  $C_{x_1} = C_{x_2}$ . Therefore,

$$\frac{W_{S_2}}{W_{S_1}} = \frac{k(k - \rho_1)}{(1 - \rho_2)} \quad (\text{Eq. 5})$$

Thus, the mean waiting time for the batch system of the present invention is reduced by a factor on the order of  $k^2$  as compared to the mean waiting time for the prior art real-time system.

[0042] The mean system time ( $T_S$ ) is defined as the sum of mean waiting time ( $W_x$ ) and the mean service time ( $\bar{x}$ ), i.e.

$$T_{S_1} = W_{S_1} + \bar{x}_1 \quad \text{and} \quad T_{S_2} = W_{S_2} + \bar{x}_2 = W_{S_2} + k\bar{x}_1 \quad (\text{Eqs. 6})$$

Therefore,

$$\frac{T_{S_2}}{T_{S_1}} = \frac{W_{S_2} + k\bar{x}_1}{W_{S_1} + \bar{x}_1} \geq \frac{W_{S_2}}{W_{S_1}} = \frac{k(k - \rho_1)}{(1 - \rho_2)} \quad (\text{Eq. 7})$$

[0043] The access times of the systems  $S_1$  and  $S_2$  are compared by assuming, in Equation 7, that the average article or electronic document is on the order of 5000 bytes, that the (software-based) encryption speed is on the order of 100Kbps, that the size of the ciphertext approximately equals the corresponding cleartext, that the transmission links are T1 lines ( $\approx 1.5$  Mbps), and that the memory access throughput is 10 Mbps (i.e.  $r(CT) \ll t(CT)$ ). This comparison indicates that the first system  $S_1$ , which employs the inventive method, has an access time of about 1/435th, or about 0.02%, of the access time of the second or prior art system  $S_2$ .

[0044] Thus, there is realized a substantial improvement in access time by encrypting the electronic newspaper once, off-line, for all users as compared to individually encrypting the newspaper for each user in real-time upon arrival of that user's request.

[0045] Thus, while there have been shown and described and pointed out fundamental novel features of the invention as applied to preferred embodiments thereof, it will be understood that various omissions and substitutions and changes in the form and details of the disclosed invention may be made by those skilled in the art without departing from the invention. It is the intention, therefore, to be limited only as indicated by the scope of the claims appended hereto.

## Claims

1. A method of controlling access to electronically-defined information among a plurality of users connected to a network having a server operable for assuring that the electronically-defined information is accessible by only at least a predetermined one of the plural users, each of said plural users having a unique first encryption key, said method comprising the steps of:

encrypting the electronically-defined information using a second encryption key known only to the server to define encrypted information;  
 storing the encrypted information in network-associated electronic storage accessible through the network to said plurality of users;  
 encrypting the second encryption key using the first encryption key of the predetermined user to which access to the electronically-defined information is to be provided so as to define an encrypted second key;  
 storing the encrypted second key in an electronic storage location accessible by said predetermine user; and

attaining access by the predetermined user to the unencrypted electronically-defined information by:

accessing the stored encrypted second key from a network-connected apparatus of the predetermined user;

decrypting the accessed encrypted second key using the first key of the predetermined user at the apparatus of the predetermined user to recover the second encryption key;

accessing the stored encrypted information from the network-connected apparatus of the predetermined user; and

decrypting the accessed encrypted information using the recovered second encryption key to recover the electrically-defined information for examination of the recovered information by the predetermined user;

# CHARACTERISED IN THAT:

each said first encryption key has a first portion ( $K_i^{1u}$ ) and a second portion ( $K_i^{1s}$ );

said first portion is known to both the server and the respective user; and

said second portion is known only to the server.

2. A method in accordance with claim 1, further comprising the step of generating the second encryption key at the server.

3. A method in accordance with claim 1, further comprising the steps of:

periodically generating a new second encryption key to replace a then-current second encryption key; and each time that a new second encryption key is generated,

encrypting the new second encryption key using the first encryption key of the predetermined user so as to define a new encrypted second key; and

storing the new encrypted second key in the electronic storage location accessible by the predetermined user to replace the encrypted second key previously stored in the electronic storage location for access by the predetermined user.

4. A method in accordance with claim 3 and further comprising, each time that a new second encryption key is generated, the steps of:

encrypting the electronically-defined information using the new second encryption key to define newly-encrypted information; and

storing the newly-encrypted information in the network-associated electronic storage accessible through the network to said plurality of users to replace the previously-stored encrypted information.

5. A method in accordance with claim 1, wherein said step of storing the encrypted second key comprises storing the encrypted second key in an electronic storage location accessible only by the predetermined user.

6. A method in accordance with claim 1, wherein said step of storing the encrypted information comprises storing the encrypted information in electronic storage associated with the server.

7. A method in accordance with claim 1, wherein said steps of accessing the stored encrypted second key, decrypting the accessed encrypted second key to recover the second encryption key, and decrypting the accessed encrypted information using the recovered second encryption key being carried out by operation of an executable program routine so as to restrict direct access by the predetermined user to the recovered second encryption key and thereby prevent unintended access to the recovered second encryption key by ones of said plural users other than the predetermined user.

8. A method in accordance with claim 1, wherein said steps of accessing the stored encrypted second key, decrypting the accessed encrypted second key to recover the second encryption key, and decrypting the accessed encrypted information using the recovered second encryption key being carried out by operation of an executable program routine at the apparatus of the predetermined user so as to restrict direct access by the predetermined user to the recovered second encryption key and thereby prevent unintended access to the recovered second encryption key by ones of said plural users other than the predetermined user.



9. A method in accordance with claim 1, where in said step of storing the encrypted second key comprises storing the encrypted second key in an electronic storage location associated with the apparatus of the predetermined user.
10. A method in accordance with claim 1, wherein said step of encrypting the electronically-defined information comprises dividing the information into a multiplicity of information portions and separately encrypting each of the multiplicity of information portions to define encrypted information comprising a multiplicity of separately-encrypted portions each individually accessible by predetermined ones of said plural users.

## Patentansprüche

1. Verfahren zum Regeln des Zugangs zu elektronisch definierten Informationen unter mehreren Benutzern, die mit einem Netzwerk verbunden sind, das einen Server aufweist, der betreibbar ist, um sicherzustellen, daß die elektronisch definierten Informationen nur mindestens einem vorbestimmten der mehreren Benutzer zugänglich sind, wobei jeder der mehreren Benutzer einen eindeutigen ersten Verschlüsselungsschlüssel besitzt, mit den folgenden Schritten:

Verschlüsseln der elektronisch definierten Informationen unter Verwendung eines zweiten Verschlüsselungsschlüssels, der nur dem Server bekannt ist, um verschlüsselte Informationen zu definieren;

Speichern der verschlüsselten Informationen in einer dem Netzwerk zugeordneten elektronischen Speicherung, die durch das Netzwerk den mehreren Benutzern zugänglich ist;

Verschlüsseln des zweiten Verschlüsselungsschlüssels unter Verwendung des ersten Verschlüsselungsschlüssels des vorbestimmten Benutzers, dem Zugang zu den elektronisch definierten Informationen gegeben werden soll, um so einen verschlüsselten zweiten Schlüssel zu definieren;

Speichern des verschlüsselten zweiten Schlüssels in einer dem vorbestimmten Benutzer zugänglichen elektronischen Speicherstelle; und

Erlangen des Zugangs durch den vorbestimmten Benutzer zu den unverschlüsselten elektronisch definierten Informationen durch:

Abrufen des gespeicherten verschlüsselten zweiten Schlüssels von einer mit dem Netzwerk verbundenen Vorrichtung des vorbestimmten Benutzers aus;

Entschlüsseln des abgerufenen verschlüsselten zweiten Schlüssels unter Verwendung des ersten Schlüssels des vorbestimmten Benutzers in der Vorrichtung des vorbestimmten Benutzers, um den zweiten Verschlüsselungsschlüssel wiederherzustellen;

Abrufen der gespeicherten verschlüsselten Informationen von der mit dem Netzwerk verbundenen Vorrichtung des vorbestimmten Benutzers aus; und

Entschlüsseln der abgerufenen verschlüsselten Informationen unter Verwendung des wiederhergestellten zweiten Verschlüsselungsschlüssels, um die elektronisch definierten Informationen zur Begutachtung der wiederhergestellten Informationen durch den vorbestimmten Benutzer wiederherzustellen;

**dadurch gekennzeichnet, daß:**

jeder erste Verschlüsselungsschlüssel einen ersten Teil ( $K_1^u$ ) und einen zweiten Teil ( $K_1^s$ ) aufweist;

wobei der erste Teil sowohl dem Server als auch dem jeweiligen Benutzer bekannt ist; und

der zweite Teil nur dem Server bekannt ist.

2. Verfahren nach Anspruch 1, weiterhin mit dem Schritt des Erzeugens des zweiten Verschlüsselungsschlüssels im Server.

3. Verfahren nach Anspruch 1, weiterhin mit den folgenden Schritten:

periodisches Erzeugen eines neuen zweiten Verschlüsselungsschlüssels, der einen zu diesem Zeitpunkt aktuellen zweiten Verschlüsselungsschlüssel ersetzen soll; und

jedesmal, wenn ein neuer zweiter Verschlüsselungsschlüssel erzeugt wird:

Verschlüsseln des neuen zweiten Verschlüsselungsschlüssels unter Verwendung des ersten Verschlüsselungsschlüssels des vorbestimmten Benutzers, um so einen neuen verschlüsselten zweiten Schlüssel zu definieren; und

Speichern des neuen verschlüsselten zweiten Schlüssels in der dem vorbestimmten Benutzer zugänglichen elektronischen Speicherstelle, um den zuvor in der elektronischen Speicherstelle gespeicherten verschlüsselten zweiten Schlüssel zum Zugang durch den vorbestimmten Benutzer zu ersetzen.

4. Verfahren nach Anspruch 3 und weiterhin, jedesmal, wenn ein neuer zweiter Verschlüsselungsschlüssel erzeugt wird, weiterhin mit den folgenden Schritten:

Verschlüsseln der elektronisch definierten Informationen unter Verwendung des neuen zweiten Verschlüsselungsschlüssels, um neu verschlüsselte Informationen zu definieren; und

Speichern der neu verschlüsselten Informationen in der dem Netzwerk zugeordneten elektronischen Speicherung, die durch das Netzwerk den mehreren Benutzern zugänglich ist, um die zuvor gespeicherten verschlüsselten Informationen zu ersetzen.

5. Verfahren nach Anspruch 1, wobei der Schritt des Speicherns des verschlüsselten zweiten Schlüssels das Speichern des verschlüsselten zweiten Schlüssels in einer nur dem vorbestimmten Benutzer zugänglichen elektronischen Speicherstelle umfaßt.

6. Verfahren nach Anspruch 1, wobei der Schritt des Speicherns der verschlüsselten Informationen das Speichern der verschlüsselten Informationen in einer dem Server zugeordneten elektronischen Speicherung umfaßt.

7. Verfahren nach Anspruch 1, wobei die Schritte des Abrufens des gespeicherten verschlüsselten zweiten Schlüssels, des Entschlüsselns des abgerufenen verschlüsselten zweiten Schlüssels, um den zweiten Verschlüsselungsschlüssel wiederherzustellen, und des Entschlüsselns der abgerufenen verschlüsselten Informationen unter Verwendung des wiederhergestellten zweiten Verschlüsselungsschlüssels durch Betreiben einer ausführbaren Programmroutine ausgeführt werden, um so den direkten Zugang durch den vorbestimmten Benutzer auf den wiederhergestellten zweiten Verschlüsselungsschlüssel einzuschränken und dadurch einen unbeabsichtigten Zugang zu dem wiederhergestellten zweiten Verschlüsselungsschlüssel durch von dem vorbestimmten Benutzer verschiedene einzelne der mehreren Benutzer zu verhindern.

8. Verfahren nach Anspruch 1, wobei die Schritte des Abrufens des gespeicherten verschlüsselten zweiten Schlüssels, des Entschlüsselns des abgerufenen verschlüsselten zweiten Schlüssels, um den zweiten Verschlüsselungsschlüssel wiederherzustellen, und des Entschlüsselns der abgerufenen verschlüsselten Informationen unter Verwendung des wiederhergestellten zweiten Verschlüsselungsschlüssels durch Betreiben einer ausführbaren Programmroutine in der Vorrichtung des vorbestimmten Benutzers ausgeführt werden, um so den direkten Zugang durch den vorbestimmten Benutzer auf den wiederhergestellten zweiten Verschlüsselungsschlüssel einzuschränken und dadurch einen unbeabsichtigten Zugang zu dem wiederhergestellten zweiten Verschlüsselungsschlüssel durch von dem vorbestimmten Benutzer verschiedene einzelne der mehreren Benutzer zu verhindern.

9. Verfahren nach Anspruch 1, wobei der Schritt des Speicherns des verschlüsselten zweiten Schlüssels das Speichern des verschlüsselten zweiten Schlüssels in einer der Vorrichtung des vorbestimmten Benutzers zugeordneten elektronischen Speicherstelle umfaßt.

10. Verfahren nach Anspruch 1, wobei der Schritt des Verschlüsseln der elektronisch definierten Informationen das Aufteilen der Informationen in mehrere Informationsteile und das getrennte Verschlüsseln jedes der mehreren Informationsteile umfaßt, um verschlüsselte Informationen zu definieren, die mehrere getrennt verschlüsselte Teile umfassen, die jeweils einzeln vorbestimmten der mehreren Benutzer zugänglich sind.

## Revendications

1. Procédé de commande d'accès à des informations définies électroniquement parmi une pluralité d'utilisateurs connectés à un réseau ayant un serveur exploitable pour assurer que les informations définies électroniquement sont accessibles uniquement par au moins un utilisateur prédéterminé des plusieurs utilisateurs, chacun desdits plusieurs utilisateurs ayant une première clé de cryptage unique, ledit procédé comprenant les étapes de :

cryptage des informations définies électroniquement en utilisant une deuxième clé de cryptage connue uniquement du serveur afin de définir des informations cryptées ;  
 mémorisation des informations cryptées dans une mémoire électronique associée au réseau accessible par le biais du réseau par ladite pluralité d'utilisateurs ;  
 cryptage de la deuxième clé de cryptage en utilisant la première clé de cryptage de l'utilisateur prédéterminé auquel l'accès aux informations définies électroniquement doit être fourni de manière à définir une deuxième clé cryptée ;  
 mémorisation de la deuxième clé cryptée dans un emplacement mémoire électronique accessible par ledit utilisateur prédéterminé ; et  
 obtention de l'accès par l'utilisateur prédéterminé aux informations définies électroniquement non cryptées en :

accédant à la deuxième clé cryptée mémorisée à partir d'un dispositif connecté au réseau de l'utilisateur prédéterminé ;  
 décryptant la deuxième clé cryptée ayant fait l'objet d'un accès en utilisant la première clé de l'utilisateur prédéterminé au niveau du dispositif de l'utilisateur prédéterminé afin de récupérer la deuxième clé de cryptage ;  
 accédant aux informations cryptées mémorisées à partir du dispositif connecté au réseau de l'utilisateur prédéterminé ; et  
 décryptant les informations cryptées ayant fait l'objet d'un accès en utilisant la deuxième clé cryptée récupérée afin de récupérer les informations définies électroniquement en vue de l'examen des informations récupérées par l'utilisateur prédéterminé ;

**CARACTERISE EN CE QUE :**

chaque dite première clé de cryptage a une première partie ( $K_i^u$ ) et une deuxième partie ( $K_i^s$ ) ;  
 ladite première partie est connue à la fois du serveur et de l'utilisateur respectif ; et  
 ladite deuxième partie est connue uniquement du serveur.

2. Procédé selon la revendication 1, comprenant en outre l'étape de génération de la deuxième clé de cryptage au niveau du serveur.

3. Procédé selon la revendication 1, comprenant en outre les étapes de :

génération périodique d'une nouvelle deuxième clé de cryptage afin de remplacer une deuxième clé de cryptage alors actuelle ; et  
 chaque fois qu'une nouvelle deuxième clé de cryptage est générée,  
 cryptage de la nouvelle deuxième clé de cryptage en utilisant la première clé de cryptage de l'utilisateur prédéterminé afin de définir une nouvelle deuxième clé cryptée ; et  
 mémorisation de la nouvelle deuxième clé cryptée dans l'emplacement de mémorisation électronique accessible par l'utilisateur prédéterminé afin de remplacer la deuxième clé cryptée précédemment mémorisée dans l'emplacement de mémoire électronique en vue de son accès par l'utilisateur prédéterminé.

4. Procédé selon la revendication 3, et comprenant en outre, chaque fois qu'une nouvelle deuxième clé de cryptage est générée, les étapes de :

cryptage des informations définies électroniquement en utilisant la nouvelle deuxième clé de cryptage afin de définir des informations nouvellement cryptées ; et  
 mémorisation des informations nouvellement cryptées dans la mémoire électronique associée au réseau accessible par le biais du réseau par ladite pluralité d'utilisateurs afin de remplacer les informations cryptées précédemment mémorisées.

5. Procédé selon la revendication 1, dans lequel ladite étape de mémorisation de la deuxième clé cryptée comprend la mémorisation de la deuxième clé cryptée dans un emplacement mémoire électronique accessible uniquement par l'utilisateur prédéterminé.

5 6. Procédé selon la revendication 1, dans lequel ladite étape de mémorisation des informations cryptées comprend la mémorisation des informations cryptées dans une mémoire électronique associée au serveur.

7. Procédé selon la revendication 1, dans lequel lesdites étapes d'accès à la deuxième clé cryptée mémorisée, de  
10 décryptage de la deuxième clé cryptée ayant fait l'objet d'un accès afin de récupérer la deuxième clé de cryptage, et de décryptage des informations cryptées ayant fait l'objet d'un accès en utilisant la deuxième clé de cryptage récupérée sont effectuées par l'opération d'un sous-programme exécutable de manière à limiter l'accès direct par l'utilisateur prédéterminé à la deuxième clé de cryptage récupérée et ainsi empêcher un accès non prévu à la deuxième clé de cryptage récupérée par des utilisateurs desdits plusieurs utilisateurs autres que l'utilisateur prédéterminé.

8. Procédé selon la revendication 1, dans lequel lesdites étapes d'accès à la deuxième clé cryptée mémorisée, de  
15 décryptage de la deuxième clé cryptée ayant fait l'objet d'un accès afin de récupérer la deuxième clé de cryptage, et de décryptage des informations cryptées ayant fait l'objet d'un accès en utilisant la deuxième clé de cryptage récupérée sont effectuées par l'opération d'un sous-programme exécutable au niveau du dispositif de l'utilisateur prédéterminé de manière à limiter l'accès direct par l'utilisateur prédéterminé à la deuxième clé de cryptage récupérée et ainsi empêcher un accès non prévu à la deuxième clé de cryptage récupérée par des utilisateurs desdits plusieurs utilisateurs autres que l'utilisateur prédéterminé.

9. Procédé selon la revendication 1, dans lequel ladite étape de mémorisation de la deuxième clé cryptée comprend  
25 la mémorisation de la deuxième clé cryptée dans un emplacement mémoire électronique associé au dispositif de l'utilisateur prédéterminé.

10. Procédé selon la revendication 1, dans lequel ladite étape de cryptage des informations définies électroniquement comprend la division des informations en une multiplicité de parties d'informations et le cryptage séparé de chacune  
30 de la multiplicité de parties d'informations afin de définir des informations cryptées comprenant une multiplicité de parties cryptées séparément, chacune accessible individuellement par des utilisateurs prédéterminés desdits plusieurs utilisateurs.

35

40

45

50

55

FIG. 1

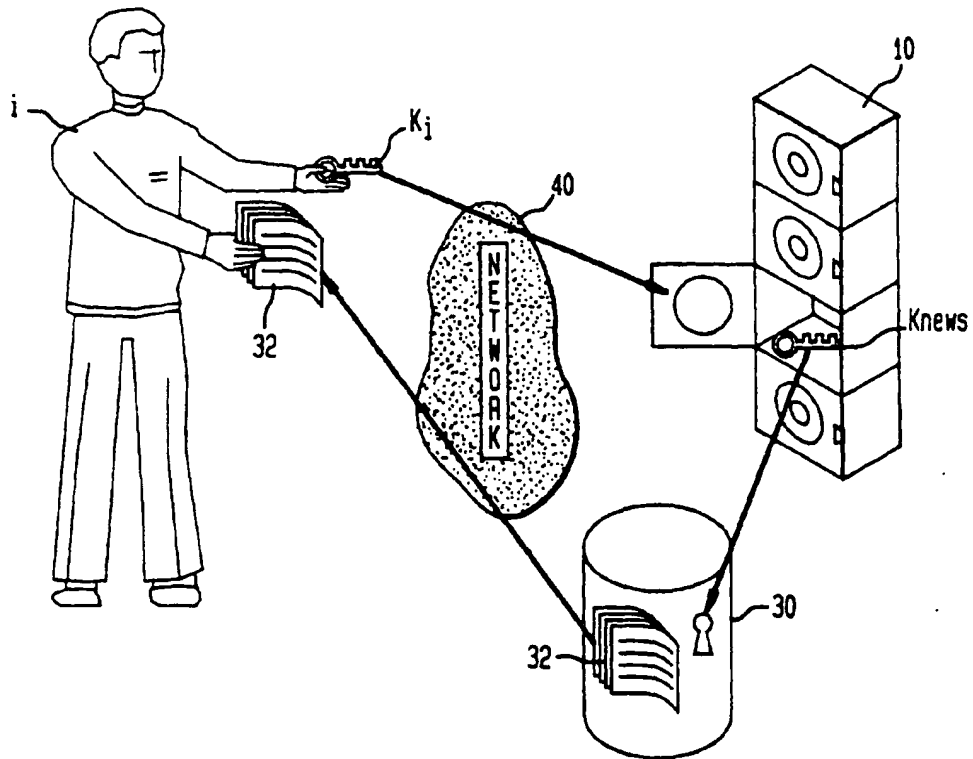


FIG. 2

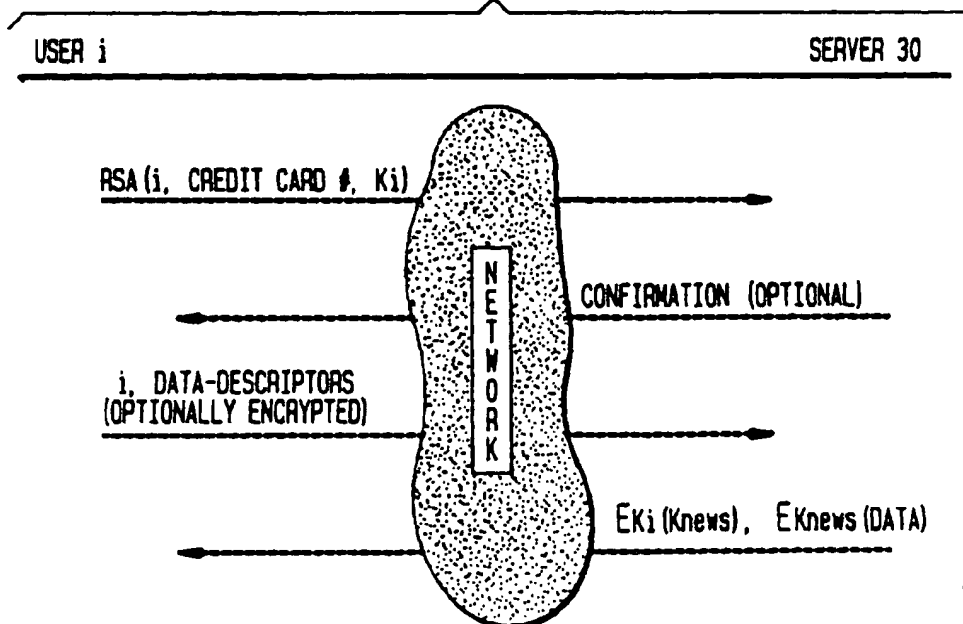


FIG. 3

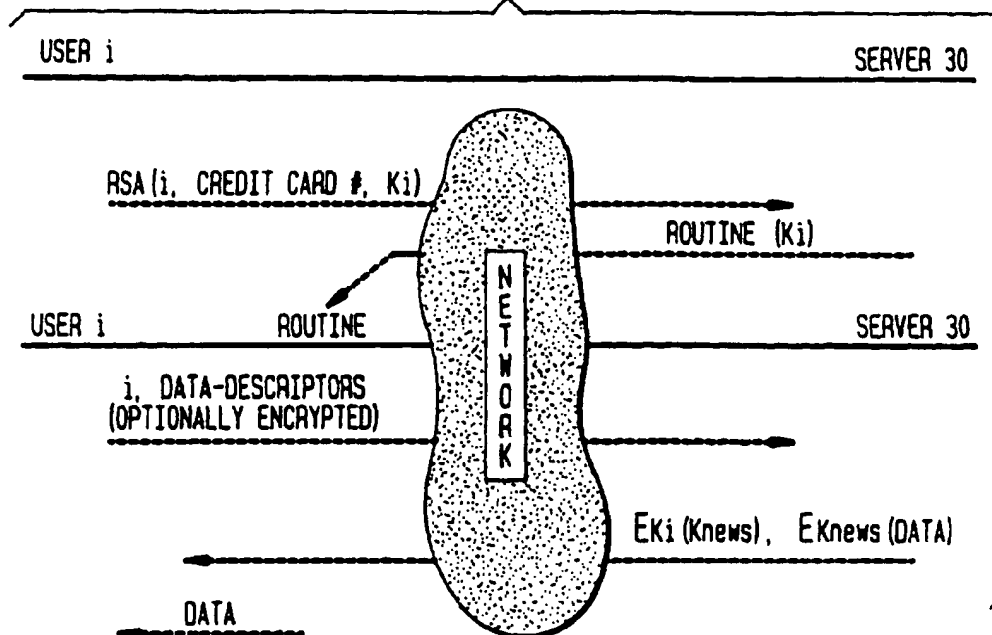


FIG. 4

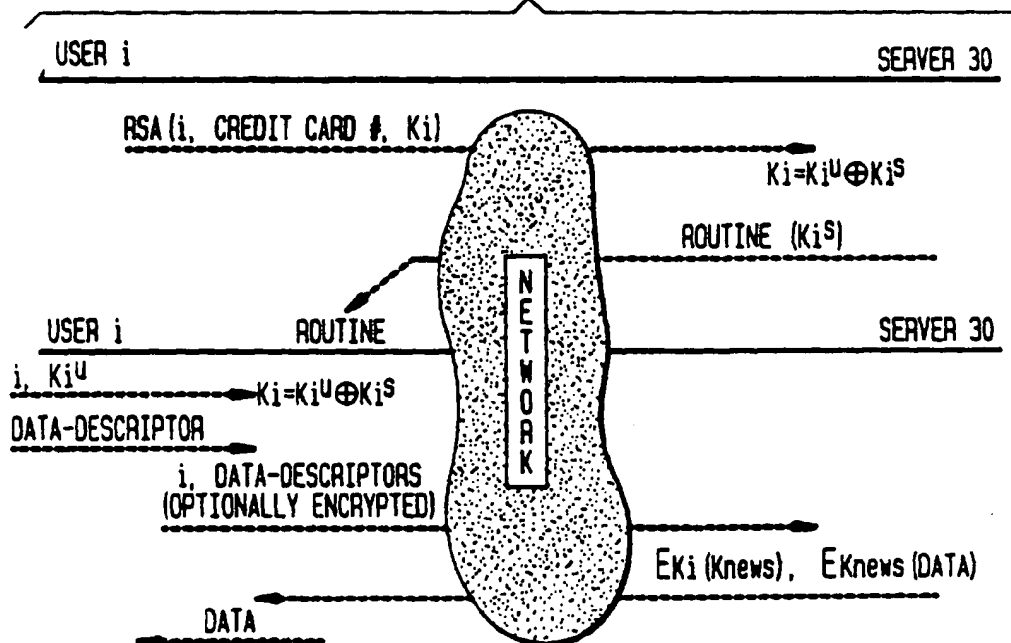
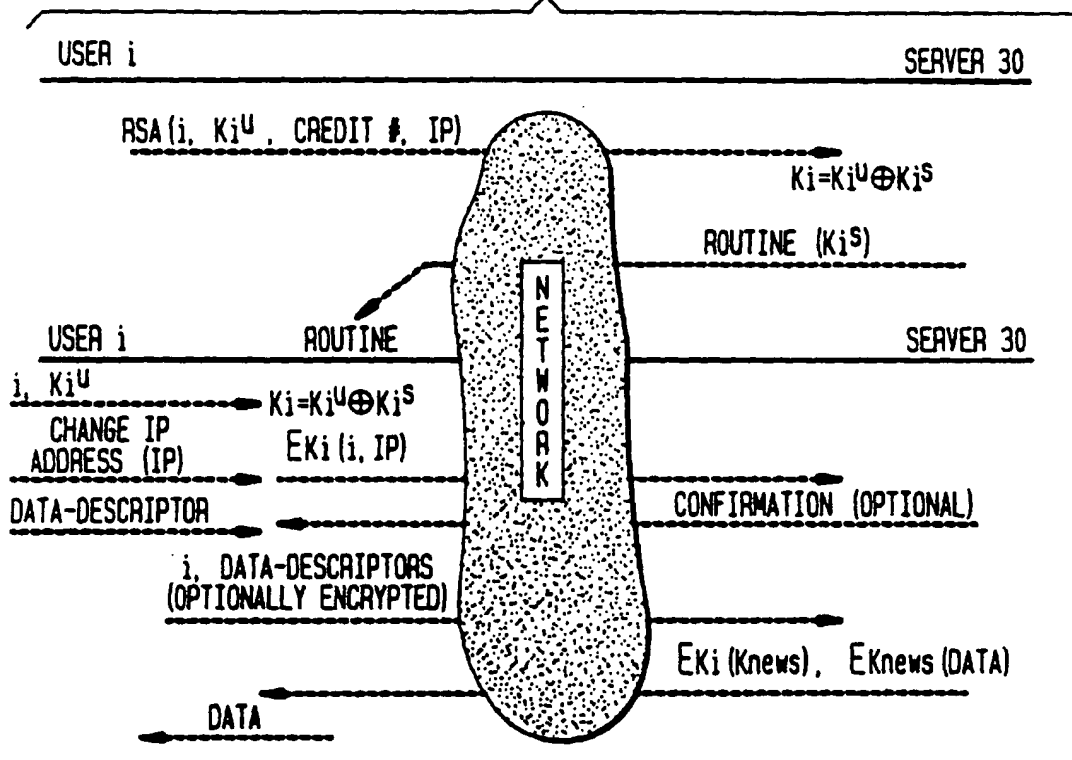


FIG. 5



**FIG. 6**

```

MOV AX, I (FIRST)    //INDIRECTLY JUMP THROUGH INDEXING WITH THE CONTENT
                     //OF LOCATION FIRST

MOV DS, AX
MOV SUM, 0
CMP SUM, 100
JNA NOT-DONE
FIRST: MOV AL, SUM    //THE VALUE OF THIS LOCATION DETERMINES THE KEY OFFSET
      :
      :
      :
NOT-DONE:
      :
      :
      :
MOV DS, AX
MOV ES, AX
CMP SUM, 73          //OFFSET WITH FIRST POINTS HERE. THE KEY STARTS
MOV SI, AX           //HERE AND MAY GO ON SPANNING SEVERAL
                     //"DUMMY" INSTRUCTIONS
      :
      :

```

**FIG. 7**

```

MOV AX, I (SECOND)   //INDIRECTLY JUMP THROUGH INDEXING WITH THE CONTENT
                     //OF LOCATION SECOND

MOV DS, AX
MOV SUM, 0
MOV AL, SUM
CMP SUM, 100
JNA NOT-DONE
      :
      :
      :
NOT-DONE:
      :
      :
      :
SECOND: CMP SUM, 45   //THE VALUE OF THIS LOCATION DETERMINES THE KEY OFFSET
      :
      :
      :
MOV DS, AX
MOV ES, AX
CMP SUM, 73          //OFFSET WITH SECOND POINTS HERE. THE KEY STARTS
MOV SI, AX           //HERE AND MAY GO ON SPANNING SEVERAL
                     //"DUMMY" INSTRUCTIONS
      :
      :

```



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☒ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**